


Maximum Recommended Distance

Amps	Length
100	100'
200	75'
320	40'

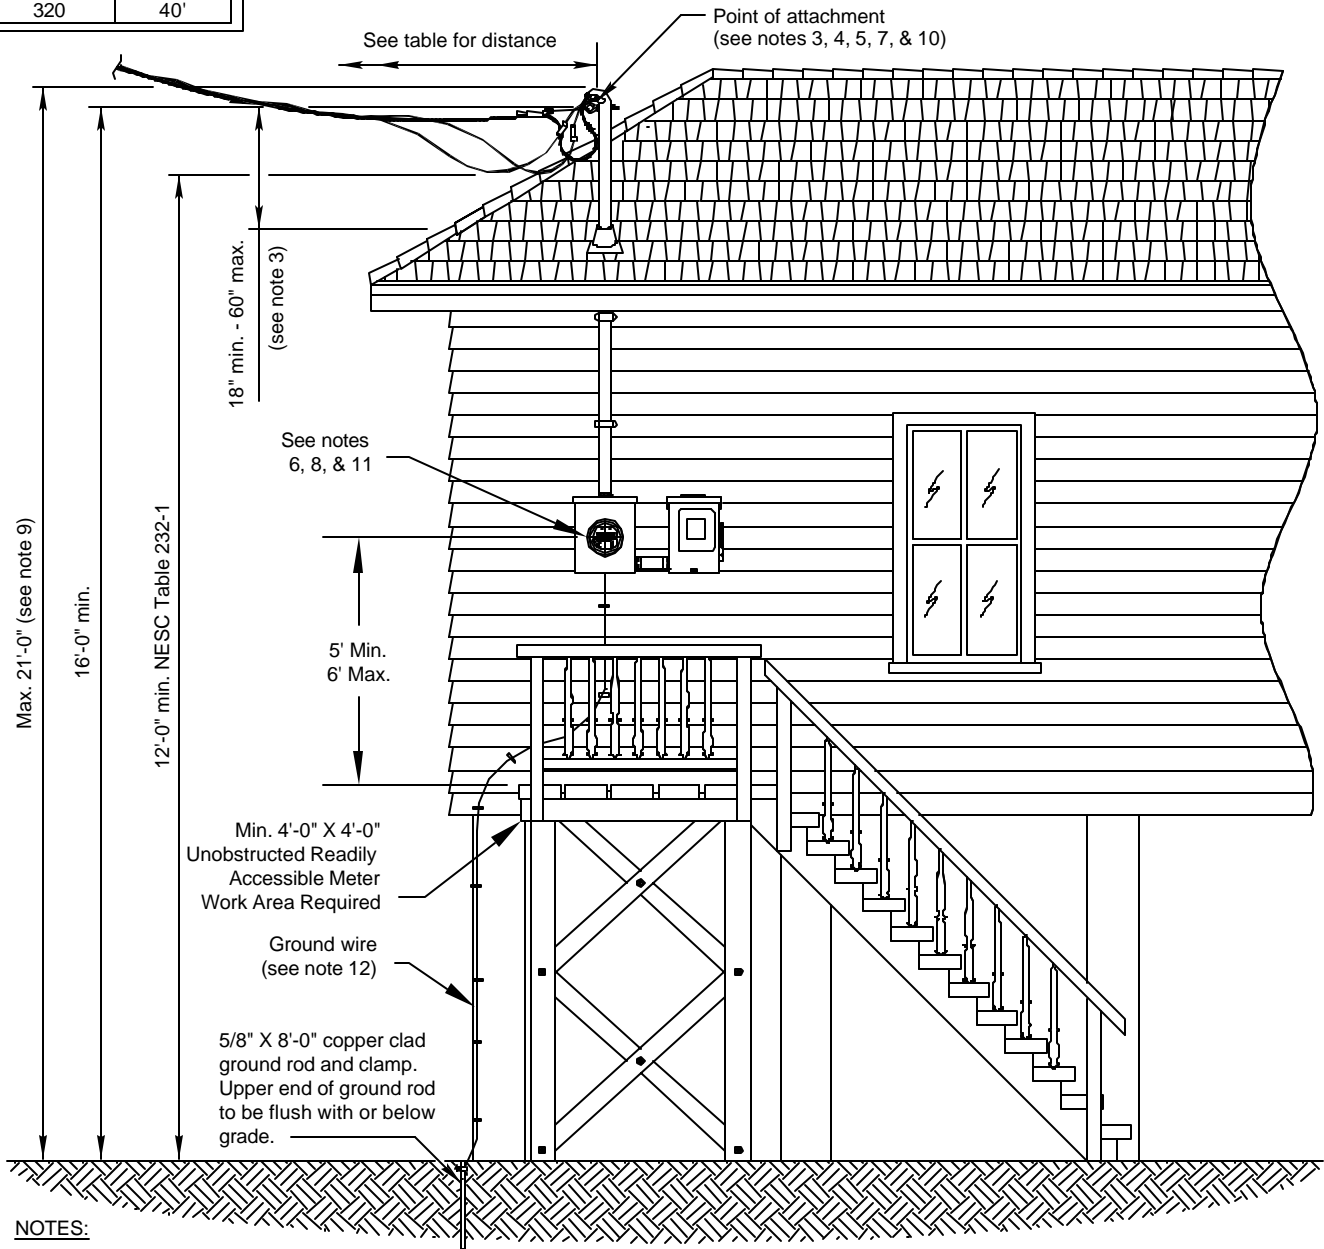

NOTES:

- Customer facilities shall comply with Company Standards, the National Electrical Code, and authorities having jurisdiction.
- Buildings or other facilities shall not be constructed under existing company supply lines, nor shall any company supply lines pass over existing buildings or facilities.
- Only rigid metal or IMC conduit can be used above the roof.
- A minimum of 3'-0" of each conductor shall extend from the top of the service mast. The neutral shall be marked with white tape at both ends. Neutral can be bare.
- Customer shall supply and install point of attachment.
- Main breaker should be within 2'-0" of meter. Outside wall is recommended.
- Guying or bracing may be required. NEC 230.28.
- Customer shall install meter enclosure.
- Additional height may be required to maintain clearance. Point of attachment can be no higher than 21'.
- No telephone or cable attachment allowed on mast. NEC 230.28.
- Minimum 3 ft. clearance between electric meter and gas meter.
- For grounding information see section 11.3.
- Any Service greater than 200 amps, consult the Company.

Call Before You Dig

1-888-258-0808

In locations with underground facilities, the Customer shall notify One Call and shall have One Call locate all underground facilities before digging. It shall be the responsibility of the Customer to stay clear of all underground facilities.

ENTERGY SERVICES, INC.

TYPICAL SINGLE PHASE RESIDENTIAL
FLOOD PLAIN RAISED FOUNDATION
METER ACCESS REQUIREMENTS


APPROVED BY: JRH	DATE: August 2007
CHECKED BY: JED	SCALE: NONE
DRAWN BY: DAT	




No. SS11.7-1

PLOT 1=1 SH. 1 OF 1


NO.	DATE:	REVISION	BY:	APPR:

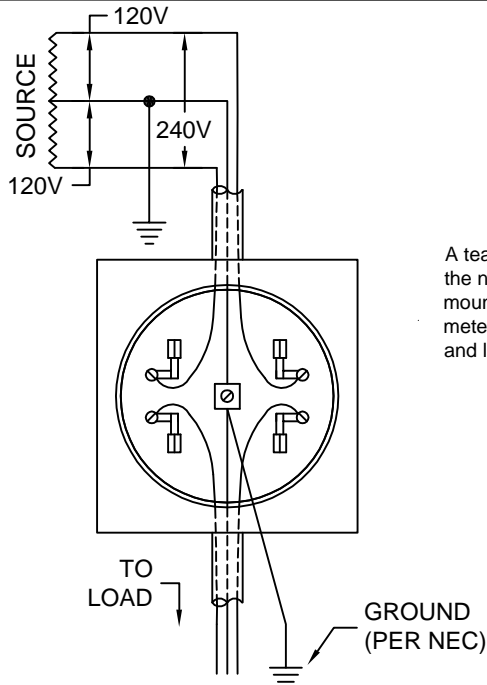


TYPE S DETACHABLE
3 WIRE SINGLE PHASE 120/240 VOLTS

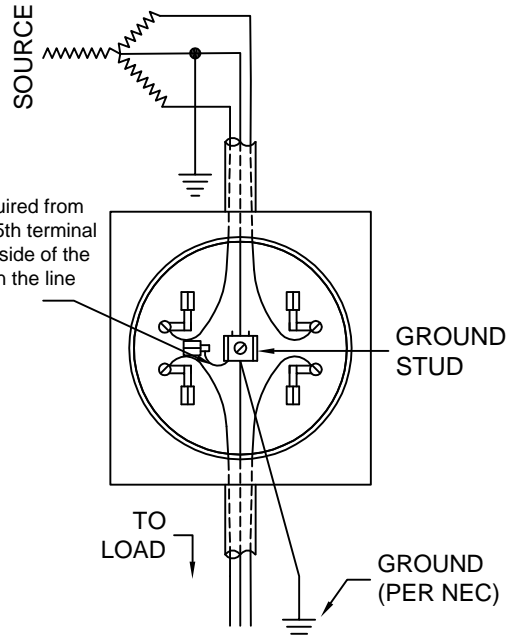

TYPE S DETACHABLE
3 WIRE SINGLE PHASE 120/208 WYE VOLTS

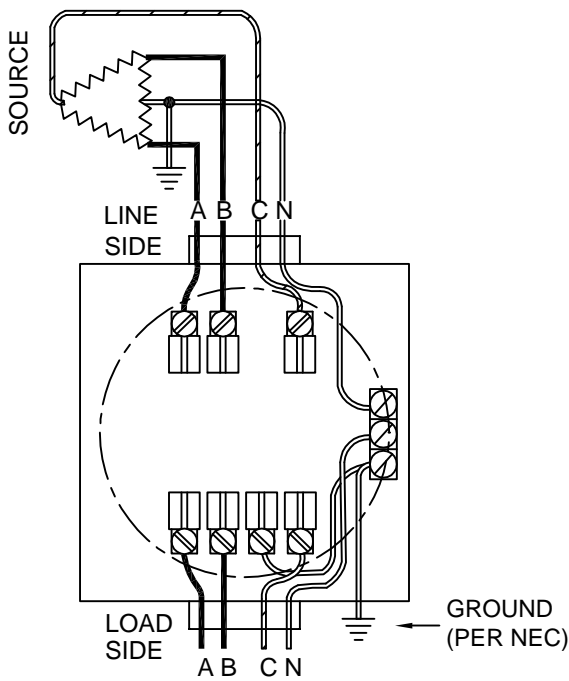

THREE PHASE 4 WIRE DELTA
120 / 240 VOLTS

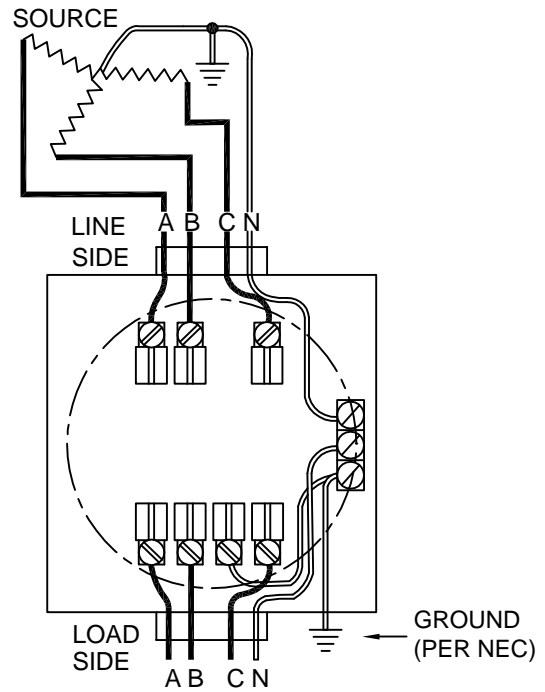

THREE PHASE 4 WIRE WYE
120 / 208 or 277/480 VOLTS

NOTES:

1. Ungrounded Conductor with the Higher Voltage to Ground (Phase marked C) must be marked orange (NEC 110.15 & 230.56).
2. All sockets, except residential single phase less than 320 Amps, shall have a manual mechanical gang operated bypass switch.
3. Load and supply wires shall not cross in the meter socket (11.1.2.7)

ENTERGY SERVICES, INC.	
WIRING DIAGRAM CONNECTIONS FOR OVERHEAD SELF CONTAINED METERS	
APPROVED BY: JDS	DATE: JUNE 1999
CHECKED BY: LKE	SCALE: NONE
DRAWN BY: CMS	
No. SS11.8-1	
	PLOT 1=1 SH. 1 OF 2

2	3/08	UPDATED: CUSTOMER INSTALLATION STANDARDS TEAM	DAT	
1	4/02	UPDATED: CUSTOMER INSTALLATION STANDARDS TEAM	DAT	
NO.	DATE:	REVISION	BY:	APPR: